




# HI-FINITY

The Hi-Finity sliding patio door is the epitome of modern design, combining the ultimate in contemporary aesthetics with outstanding performance.

This state-of-the-art structurally glazed door offers the possibility of floor to ceiling glass, a 35mm interlock between door panels, a contemporary and ergonomically designed soft-touch slim-line handle and a concealed electronic locking system. A fully automated version is also available - at the push of a button, a concealed motor will open and close the door smoothly and with no fuss.

For the discerning householder or architect who wants the very latest in contemporary design and ultimate performance, the Hi-Finity door sets a new benchmark of excellence.




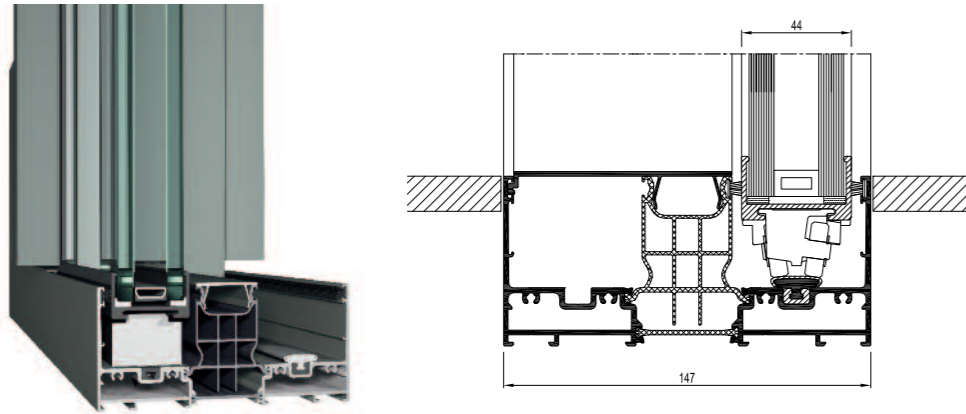


## Designs

With a maximum door height of 3500mm and a maximum door panel weight of as much as 500kg<sup>(6)</sup>, the Hi-Finity door stretches the boundaries of what is possible in terms of size. By combining these huge door panels in a range of double track and triple track designs, Reynaers at Home can offer a truly panoramic expanse of glass to make the most of any view.

### Duo rail

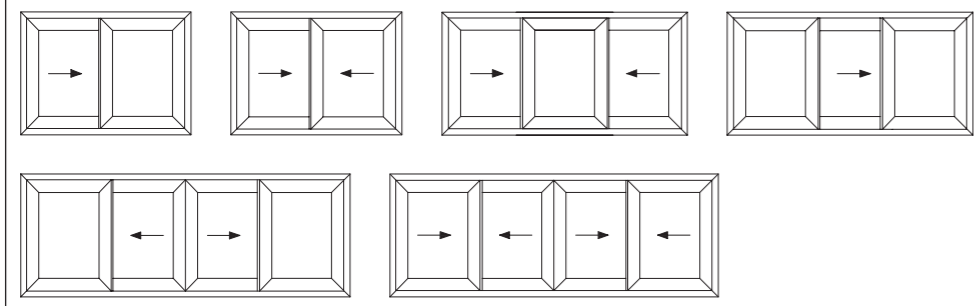

### 3-rail

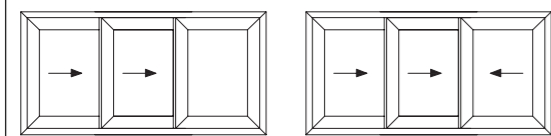

## The highest specification


The design that makes it possible to move half a ton of glass smoothly, easily and safely is tribute to an exceptional level of engineering expertise. This elegant sliding door exemplifies attention to detail and some very clever design. The compact wheel carriages (patent pending), for example, are made using only the highest quality materials; the six stainless steel wheels being set at an angle to operate smoothly with even the heaviest of loads.



Slimline handle




Wheel carriage

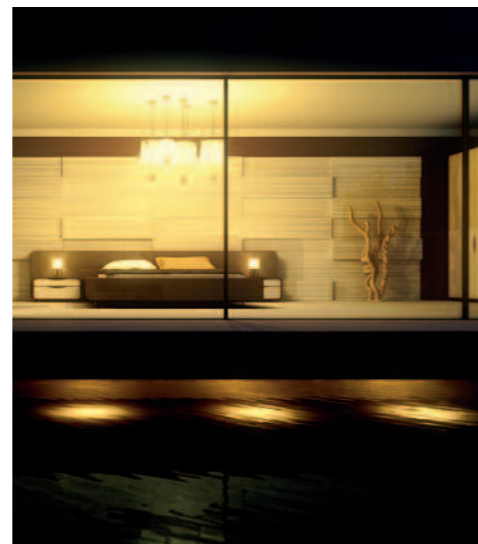

## Automatic operation

All Hi-Finity doors incorporate an electronic locking system that is concealed in the top frame profile and is operated via either a wall-mounted push button or a remote control.

For the ultimate in convenience and to create a stunning feature in any room, the Hi-Finity door can be specified with an integrated motor that is concealed in the top frame profile. At the push of a button the door opens smoothly, and when closed the locks will automatically engage.

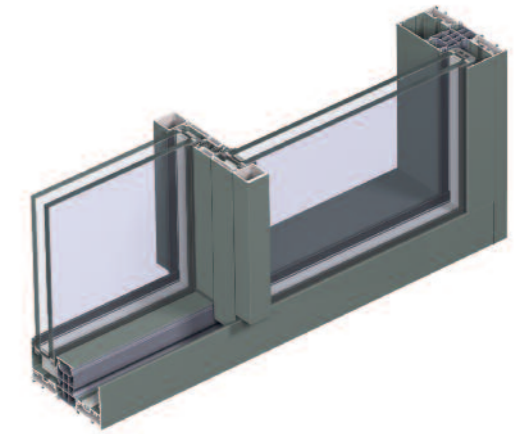

## Technical Characteristics

Variants		DOUBLE GLAZING
Visible width / height	Built-in frame	68 mm / 100 mm
	Vents	8 mm
	Meeting section	35 mm
	Meeting section 4 doors	67 mm
Overall system depth	Frame	Duo Rail : 147 mm 3-Rail : 234 mm
	Vent	44 mm
Maximum element height		3500 mm
Maximum vent weight		500 kg / 300 kg motorised
Glass thickness		36-38 mm
Glazing method		Structural glazing
Thermal insulation		41 and 50 mm fibreglass reinforced polyimide strips

## Performance

Of course the Hi-Finity sliding door also offers exceptional levels of thermal insulation, weather resistance and security.

- U<sub>d</sub> values as low as 1.3W/m<sup>2</sup>K (for a door that is 4.6m x 3.0m with U<sub>g</sub> of 1.1W/m<sup>2</sup>K and Psi value of 0.08)
- Complies with European security standard RC2
- Air tightness class 4 (600Pa)
- Water tightness class 9a (600Pa)

## Performances

Energy	U <sub>f</sub> -value down to 2.0 W/m <sup>2</sup> K, depending on the frame/vent combination with glazing thickness of 38 mm.									
Thermal Insulation <sup>(1)</sup> EN ISO 10077-2										
Comfort										
Air tightness, max. test pressure <sup>(2)</sup> EN 1026; EN 12207	1 (150 Pa)	2 (300 Pa)	3 (600 Pa)	4 (600 Pa)						
Water tightness <sup>(3)</sup> EN 1027; EN 12208	1A (0 Pa)	2A (50 Pa)	3A (100 Pa)	4A (150 Pa)	5A (200 Pa)	6A (250 Pa)	7A (300 Pa)	8A (450 Pa)	9A (600 Pa)	E900 (900 Pa)
Wind load resistance, max. test pressure <sup>(4)</sup> EN 12211; EN 12212	1 (400 Pa)	2 (800 Pa)	3 (1200 Pa)	4 (1600 Pa)	5 (2000 Pa)	Exxx (>2000 Pa)				
Wind load resistance to frontal deflection EN 12211; EN 12210	A (<1/150 Pa)		B (<1/200 Pa)			C (<1/300 Pa)				
Safety										
Burglar resistance <sup>(5)</sup> EN 1628-EN 1630; EN 1627	RC 1		RC 2				RC 3			

This table shows classes and values of performances, which can be achieved for specific configurations and opening types.

- (1) The U<sub>f</sub>-value measures the heat flow. The lower the U<sub>f</sub>-value, the better the thermal insulation of the frame.
- (2) The air tightness test measures the volume of air that would pass through a closed door at a certain air pressure.
- (3) The water tightness test involves applying a uniform water spray at increasing air pressure until water penetrates the door.
- (4) The wind load resistance is a measure of the profile's structural strength and is tested by applying increasing levels of air pressure to simulate the wind force.
- (5) The burglar resistance is tested by static and dynamic loads, as well as by simulated attempts to break in using specified tools.
- (6) Refer to Reynaers' technical catalogue for maximum sizes and operational force requirements.



Reynaers at Home · Kettles Wood Drive · Birmingham · B32 3DB

T 0121 421 9707 E [homeuk@reynaers.com](mailto:homeuk@reynaers.com)

[www.reynaersathome.co.uk](http://www.reynaersathome.co.uk)

Part of the Reynaers family

